

M3202A PXIe Arbitrary Waveform Generator with Optional Real-Time Sequencing and FPGA Programming

1 GSa/s, 14 Bits, 4 Channels

Generate High-Precision, Complex, Real-World Signals

The M3202A high-performance, high-bandwidth arbitrary waveform generator combines an advanced waveform generation system with embedded function generators and modulators (frequency/phase/amplitude) for broadband and IF signal generation. Performance meets simplicity thanks to easy-to-use programming libraries, real-time sequencing technology (Hard Virtual Instrumentation or HVI technology), and graphical FPGA programming technology.

Features

- 1 GS/s, 14 bits, 4 ch, 400 MHz BW (800 MHz IQ)
- Embedded advanced arbitrary waveform generators (AWGs)
 - Advanced triggering and marking (up to 8 reconfigurable I/Os)
 - Waveform queue system with cycles, delays and prescalers
- Embedded high-precision function generators (FGs)
 - Sinusoidal, triangular, square, DC, and more
 - 45-bit frequency resolution (up to $\sim 5.68 \mu\text{Hz}$)
 - 24-bit phase resolution (up to $\sim 21.5 \mu\text{deg}$)
- Embedded ultra-flexible amplitude and angle modulators
- High-quality output signal with low phase noise
 - SFDR: $\sim 54 \text{ dBc @} 160 \text{ MHz}$
 - Average noise density: down to $\sim -145 \text{ dBm/Hz}$
- Optional features
 - Simultaneous amplitude and angle modulations
- Up to 2 GB of onboard RAM ($\sim 1 \text{ Gsamples}$)
- Mechanical/interface
 - 1 slot 3U (PXIe)
 - PCIe Gen2
 - Independent direct memory access (DMA) channels for fast and efficient data transfer



Applications

Quantum computing,
5G research

Manufacturing in
wireless devices,
automated test
equipment (ATE)

MIMO, beam forming
and other multi-channel
coherent signal
generation

General purpose,
RF/arbitrary waveform
generation

R&D/scientific research
equipment, aerospace
and defense (A/D)

Programming Technology and Software Tools

Software programming

- Easy-to-use native programming libraries for most common languages: C, C++, Visual Studio, LabVIEW, MATLAB, and Python

Hardware programming (optional)

- Real-time sequencing (Hard Virtual Instrumentation or HVI technology)
 - Ultra-fast, fully-parallelized, hard real-time execution
 - Ultra-fast, time-deterministic decision-making
 - Off-the-shelf inter-module synchronization and data exchange
- FPGA programming
 - FPGA design environment and BSP support
 - Supports VHDL, Verilog and Xilinx projects, and Xilinx IP Catalog
 - Ultra-fast, one-click compiling and on-the-fly programming

SD1 2.x and SD1 3.x differences

Keysight SD1 2.x software has been upgraded to 3.x. The key differences are listed in the table below. For more detail on SD1 3.x software, refer to the Start Up Guide M3xxx-90002.

[WARNING] The 3.X version of software does not support programs using the M3601A or the M3602A applications. You will have to transition to KS2201A and KF9000A respectively.

SD1 software features	Legacy (SD1 2.1.x)	New (SD1 3.x)
Software		
Design Environment	M3601A HVI design environment (ProcessFlow)	KS2201A PathWave Test Sync Executive (HVI2 technology)
	M3602A FPGA design environment (FPGAFlow)	KF9000A PathWave FPGA Programming Environment (commonly known as PathWave FPGA)
HVI Technology	Graphical M3601A for HV1 HVI-C API (through SD1 installer)	KS2201A PathWave Test Sync Executive (HVI2 Core API through a separate HVI installer)
FPGA Programming	Graphical M3602A	KF9000A PathWave FPGA (BSP installer for each supported module is required)
	PathWave FPGA (BSP for SD1 2.1.x only)	
Soft Front Panel (SFP)	Available	Available
Programming Interface	Python, C++, C#, LabVIEW, MATLAB	Python, C, C++, C#, LabVIEW, MATLAB
Supported Operating System	Windows 10 (32 / 64 bit)	Windows 10 (64 bit)

SD1 software features	Legacy (SD1 2.1.x)	New (SD1 3.x)
Hardware modules		
M3202A (AWG 1G)	FW version < 4.0 (CH4) (CLF) (K16, K32, K41)	FW version > =4.0 (CH4) (CLF) (K16, K32, K41)
	BSP available (K32, K41)	BSP available (K32, K41)
M3201A (AWG 500)	FW version < 4.0 (CH4) (CLF) (K16, K32, K41)	FW version > =4.0 (CH4) (CLF) (K16, K32, K41)
	BSP available (K32, K41)	BSP available (K32, K41)
M3102A (DIG 500)	FW version < 2.0 (CH4) (CLF) (K16, K32, K41)	FW version > =2.0 (CH4) (CLF) (K16, K32, K41)
	BSP available (K32, K41)	BSP available (K32, K41)
M3100A (DIG 100)	FW version < 2.0 (CH4 or CH8) (CLF) (K16, K32, K41)	FW version > =2.0 (CH4) (CLF) (K32, K41)
	BSP available (K32, K41)	BSP available (K32, K41)
M3302A (COMBO 500 500)	FW version < 4.0 (CH2 AWG - CH2 DIG) (CLF) (K32, K41)	FW version > =4.0 (CH2 AWG - CH2 DIG) (CLF) (K41)
	BSP available (K32, K41)	BSP available (K41)
M3300A (COMBO 500 100)	FW version < 4.0 (CH2 AWG - CH4 DIG or CH4 AWG - CH8 DIG) (CLF) (K32, K41)	FW version > =4.0 (CH2 AWG - CH4 DIG) (CLF) (K41)
	BSP available (K32)	BSP available (K41)
No programming		
Easily configurable SD1 SFP (software front panel) interface for each connected module		

PXIe Arbitrary Waveform Generators, Digitizers and Combination Modules

Product	Type	Outputs (AWGs)				Inputs (Digitizers)			
		Speed (MSa/s)	Bits	Ch	BW (MHz)	Speed (MSa/s)	Bits	Ch	BW (MHz)
M3202A	AWG	1000	14	4	DC-400				
M3201A	AWG	500	16	4	DC-200				
M3102A	Digitizer					500	14	4	DC-200
M3100A	Digitizer					100	14	4/8	DC-100
M3302A	Combo	500	16	2	DC-200	500	14	2	DC-200
M3300A	Combo	500	16	2/4	DC-200	100	14	4/8	DC-100

Functional Block Diagram

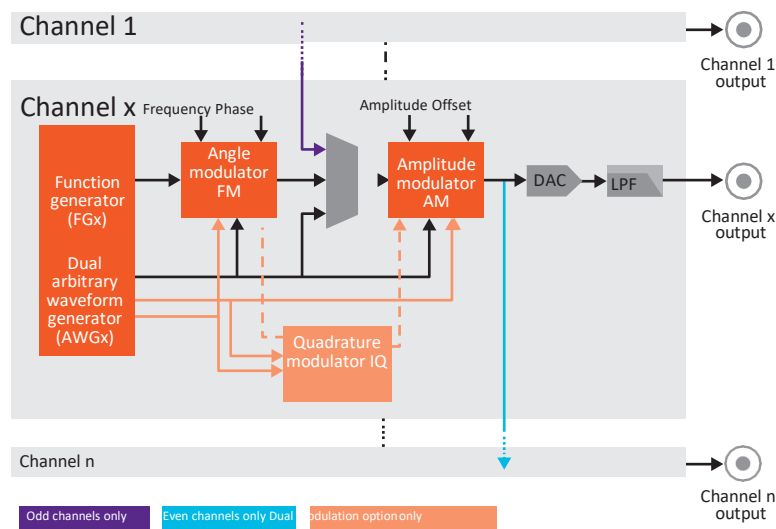


Figure 1. M3201A output functional block diagram, all channels have identical output structure

Ordering Information ¹

Product	Description
M3202A	PXI arbitrary waveform generator: 1 GSa/s, 14 Bits
Options	Description
M3202A-CH4	Four channels
M3202A-CLF	Fixed sampling clock, low jitter
M3202A-DM1	Dual modulation capability (amplitude and angle simultaneously)
M3202A-M01 / -M12 / -M20	Memory ² 16 MB, 8 MSamples / 128 MB, 60 MSamples / 2 GB, 1 GSamples
Options	Description
M3601A	HVI design environment
M3602A	FPGA design environment
KS2201A	PathWave Test Sync Executive
KF9000A	Pathwave FPGA

1. All options must be selected at time of purchase and are not upgradable.
2. These options represent the standard configuration.
3. M3601A / M3602A are supported with SD1 2.x software only whereas KS2201A / KF9000A are supported with SD1 3.x software only.

Technical Specifications and Characteristics

General characteristics

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
Inputs and outputs					
Channels (single-ended mode)	4			Out	
Channels (differential mode)	2			Out	Differential uses 2 channels
Reference clock ¹	1			Out	
Reference clock ²	1			In	
Triggers/markers ^{1, 3}	1			In/out	Reconfigurable
Triggers/markers ^{2, 3}	8			In/out	Reconfigurable
Output channels overview					
Sampling rate	1000			MSa/s	
Voltage resolution	14			Bits	
Output frequency	DC		400	MHz	
Real-time BW	400			MHz	
Output voltage	−1.5		1.5	Volts	
Built-in functionalities					
Function generators	4				1 per channel
Dual AWGs	4				1 per channel
IQ modulators	4				1 per channel
Frequency modulators	4				1 per channel
Phase modulators	4				1 per channel
Amplitude modulators	4				1 per channel
DC offset modulators	4				1 per channel
Onboard memory					
RAM memory	16		2048	MBytes	

1. At front panel.

2. At backplane.

3. Markers available from SD1 software version v3.0 or later.

I/O specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
Output channels					
Sampling rate	1.0			GSa/s	
Output frequency	DC		400	MHz	Limited by a reconstruction filter
Output voltage	−1.5		1.5	V _p	On a 50 Ω load
Source impedance	50			Ω	
Reference clock output					
Frequency	10 or 100			MHz	Generated from the internal clock, user selectable
Voltage	800			mV _{pp}	On a 50 Ω load
Power	2			dBm	On a 50 Ω load
Source impedance	50			Ω	AC coupled
External I/O trigger/marker					
V _{IH}	2		5	V	
V _{IL}	0		0.8	V	
V _{OH}	2.4		3.3	V	On a high Z load
V _{OL}	0		0.5	V	On a high Z load
Input impedance	10			KΩ	
Source impedance	TTL			—	
Speed	100			MHz	

Function generators (FGs) specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Function generators		4		–	1 per channel
Waveform types		4		–	Sinusoidal, triangular, square and DC
Frequency range	0		400	MHz	
Frequency resolution		45		Bits	
Frequency resolution		11.4		μHz	
Phase range	0		360	Deg	
Phase resolution		24		Bits	
Phase resolution		21.5		μdeg	
Speed performance					
Frequency change rate		100		MChanges/s	With HVI technology
Frequency modulation rate		1000		MSamples/s	With AWGs and angle modulators
Phase change rate		100		MChanges/s	With HVI technology
Phase modulation rate		1000		MSamples/s	With AWGs and angle modulators

Amplitude and offset specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Amplitude / offset range	−1.5		1.5	V _p	Amplitude + offset values
Amplitude / offset resolution		14		Bits	
Amplitude / offset resolution		183.1		μV	
Speed performance					
Amplitude / offset change rate		1000		MChanges/s	With HVI technology
Amplitude / offset modulation rate		1000		MSamples/s	With AWGs and amplitude modulators

Arbitrary waveform generators (AWGs) specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Dual AWGs		4			1 dual AWG per output channel
Aggregated speed (16 bits)			4	GSa/s	For all onboard waveforms combined
Aggregated speed (32 bits)			2	GSa/s	For all onboard waveforms combined
Waveform multiple		5		Samples	Waveform length must be a multiple of this value
16-bit waveform length	65		957	MSamples	Maximum depends on onboard RAM
32-bit waveform length	65		478	MSamples	Maximum depends on onboard RAM
Waveform length efficiency		93.5		%	Efficiency = waveform size / waveform size in RAM
Trigger		Select			External trigger (input connector, backplane triggers), SW/HVI trigger
AWG specifications (16-bit single waveform)					
Speed			1	GSa/s	Per AWG
Resolution		16		Bits	
AWG destination		Select			Amplitude, offset, frequency or phase
AWG specifications (16-bit dual waveform)					
Speed (waveform A)			1	GSa/s	Per AWG
Speed (waveform B)			1	GSa/s	Per AWG
Resolution (waveform A)		16		Bits	
Resolution (waveform B)		16		Bits	
AWG destination (waveform A)		Select			Amplitude and offset or I and Q control outputs on channels
AWG destination (waveform B)		Select			Frequency and phase or I and Q readouts on channels
AWG specifications (32-bit single waveform)					
Speed			0.1	GSa/s	Per AWG, minimum prescaler: 1
Resolution		32		Bits	
AWG destination		Select			Amplitude, offset, frequency or phase

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
AWG specifications (32-bit dual waveform)					
Speed (waveform A)			0.1	GSa/s	Per AWG, minimum prescaler: 1
Speed (waveform B)			0.1	GSa/s	Per AWG, minimum prescaler: 1
Resolution (waveform A)		32		Bits	
Resolution (waveform B)		32		Bits	
AWG destination (waveform A)		Select			Amplitude or offset
AWG destination (waveform B)		Select			Frequency or phase

Angle modulators specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Frequency modulators		4			1 per output channel
Phase modulators		4			1 per output channel
Carrier signal source		FGs			Refer to the FG specifications table in this document
Modulating signal source		AWGs			Refer to the AWG specifications table in this document
Frequency modulators (16-bit modulating waveform)					
Deviation	–Dev. gain		+Dev. gain	MHz	
Modulating signal resolution		16		Bits	AWG waveform
Modulating signal BW	0		500	MHz	AWG Nyquist limit
Deviation gain	0		400	MHz	
Deviation gain resolution		16		Bits	
Frequency modulators (32-bit modulating waveform)					
Deviation	–Dev. gain		+Dev. gain	MHz	
Modulating signal resolution		32		Bits	AWG waveform
Modulating signal BW	0		100	MHz	AWG Nyquist limit
Deviation gain	0		400	MHz	
Deviation gain resolution		16		Bits	
Phase modulators (16-bit modulating waveform)					
Deviation	–Dev. gain		+Dev. gain	Deg	
Modulating signal resolution		16		Bits	AWG waveform
Modulating signal BW	0		500	MHz	AWG Nyquist limit
Deviation gain	0		180	Deg	
Deviation gain resolution		16		Bits	~ 5.5 mdeg
Phase modulators (32-bit modulating waveform)					
Deviation	–Dev. gain		+Dev. gain	Deg	
Modulating signal resolution		16		Bits	AWG waveform is truncated
Modulating signal BW	0		100	MHz	AWG Nyquist limit
Deviation gain	0		180	Deg	
Deviation gain resolution		16		Bits	~ 5.5 mdeg

Amplitude modulators specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Amplitude modulators		4			1 per output channel
Offset modulators		4			1 per output channel
Carrier signal source		FGs			Refer to the FG specifications table in this document
Modulating signal source		AWGs			Refer to the AWG specifications table in this document
Amplitude and offset modulators (16-bit modulating waveform)					
Deviation	-Dev. gain		+Dev. gain	V _p	
Modulating signal resolution		16		Bits	AWG waveform
Modulating signal BW	0		500	MHz	AWG Nyquist limit
Deviation gain	0		1.5	V _p	
Deviation gain resolution		14		Bits	Limited by the output DAC
Amplitude and offset modulators (32-bit modulating waveform)					
Deviation	-Dev. gain		+Dev. gain	V _p	
Modulating signal resolution		16		Bits	AWG waveform is truncated
Modulating signal BW	0		100	MHz	AWG Nyquist limit
Deviation gain	0		1.5	V _p	
Deviation gain resolution		14		Bits	Limited by the output DAC

IQ modulators specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
IQ modulators		4			1 per output channel
Carrier signal source		FGs			Refer to the FG specifications table in this document
Modulating signal source		AWGs			Refer to the AWG specifications table in this document
Amplitude deviation	−1.5		1.5	V _p	
Phase deviation	−180		180	Deg	
I modulating signal resolution		16		Bits	AWG waveform
I modulating signal BW	0		500	MHz	AWG Nyquist limit
Q modulating signal resolution		16		Bits	AWG waveform
Q modulating signal BW	0		500	MHz	AWG Nyquist limit

Clock system specifications

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General specifications					
Clock frequency		1.0		GHz	

AC performance

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
General characteristics					
Analog output jitter		< 2		ps	RMS (cycle-to-cycle)
AWG trigger to output jitter		< 2		ps	RMS (cycle-to-cycle) for any trigger referenced to the chassis clock; independent of input trigger jitter if input jitter < 4 ns peak-to-peak
Trigger resolution		10		ns	
Channel-to-channel skew		< 20		ps	Between ch 0 and ch 1, and ch 2 and ch 3
		< 50		ps	Between any channel
		< 150		ps	Between modules, chassis dependent
Clock output jitter		< 2		ps	RMS (cycle-to-cycle)
Clock accuracy and stability		100		ppm	PXIe, PXIe versions; chassis dependent
AC characteristics					
Spurious-free dynamic range (SFDR)					P _{out} = 0 dBm, measured from DC to max frequency
• f _{out} = 10 MHz		68		dBc	
• f _{out} = 40 MHz		66		dBc	
• f _{out} = 80 MHz		62		dBc	
• f _{out} = 120 MHz		58		dBc	
• f _{out} = 160 MHz		54		dBc	
• f _{out} = 200 MHz		53		dBc	
• f _{out} = 320 MHz		55		dBc	
• f _{out} = 390 MHz		58		dBc	
Crosstalk (adjacent channels)					
• f _{out} = 10 MHz		< −105		dB	
• f _{out} = 40 MHz		−85		dB	
• f _{out} = 80 MHz		−80		dB	
• f _{out} = 120 MHz		−89		dB	
• f _{out} = 160 MHz		−76		dB	
• f _{out} = 200 MHz		−86		dB	
• f _{out} = 320 MHz		−83		dB	

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
Crosstalk (non-adjacent channels)					
• $f_{out} = 10\text{ MHz}$		< −105		dB	
• $f_{out} = 40\text{ MHz}$		−89		dB	
• $f_{out} = 80\text{ MHz}$		−81		dB	
• $f_{out} = 120\text{ MHz}$		−103		dB	
• $f_{out} = 160\text{ MHz}$		−95		dB	
• $f_{out} = 200\text{ MHz}$		−102		dB	
• $f_{out} = 320\text{ MHz}$		−97		dB	
AC characteristics					
Phase noise (SSB)					
Offset = 1 kHz		< −127		dBc/Hz	
Offset = 10 kHz		< −133		dBc/Hz	
Offset = 100 kHz		< −138		dBc/Hz	
Average noise power density		< −145		dBm/Hz	
Phase noise (SSB)					
Offset = 1 kHz		< −127		dBc/Hz	

This value corresponds to a chassis that fulfils the PXI Express specifications. This value can be improved with an external chassis clock or a System Timing Module.

This value corresponds to an M9005A PXIe chassis.

AC performance, typical

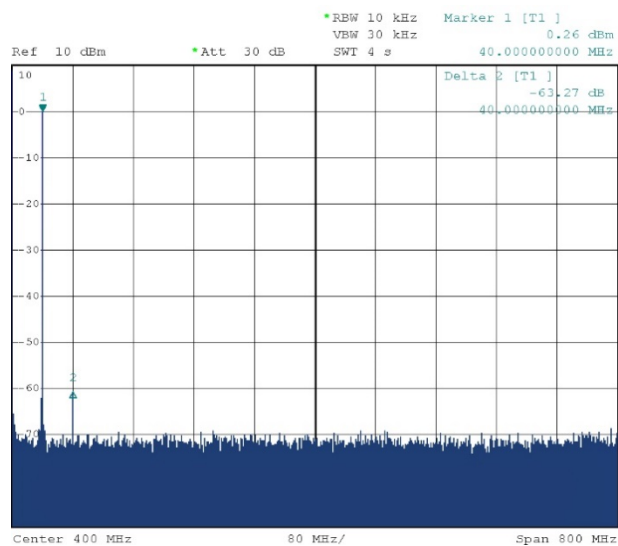


Figure 2. Single-tone spectrum @ $f_{out} = 40$ MHz

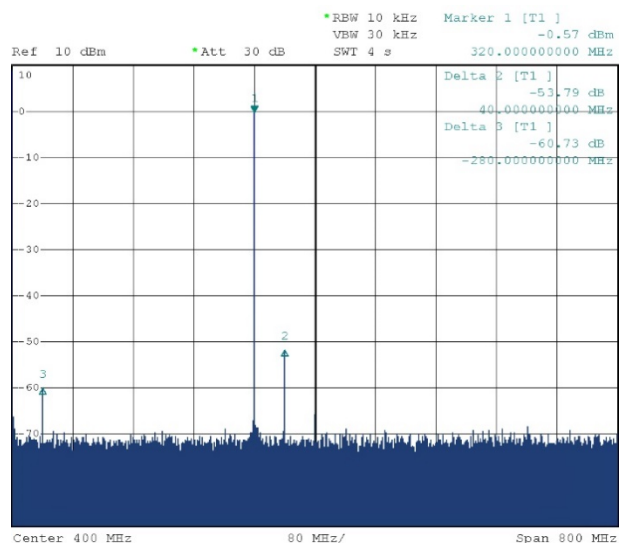


Figure 3. Single-tone spectrum @ $f_{out} = 160$ MHz

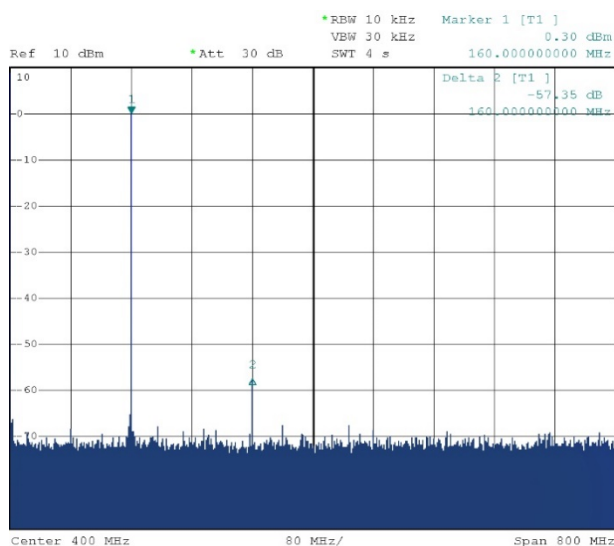


Figure 4. Single-tone spectrum @ $f_{out} = 320$ MHz

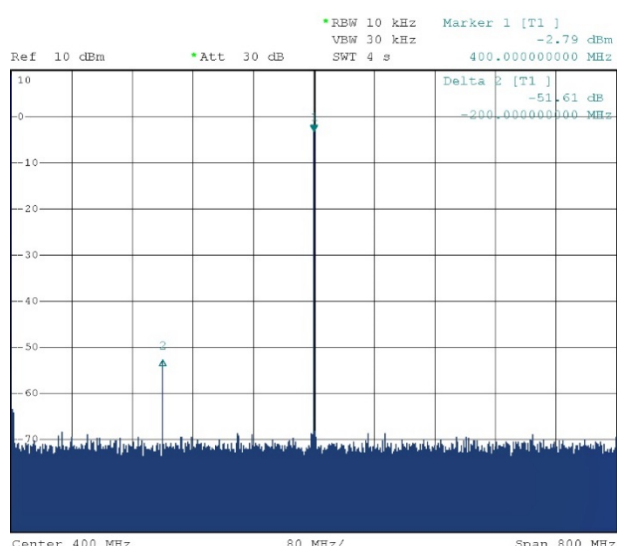


Figure 5. Single-tone spectrum @ $f_{out} = 400$ MHz

System Specifications

Environmental specifications (PXI Express)

Parameter	M3202A-CH4			Units	Comments
	Min	Typ	Max		
System bus					
Slots		1		Slot	PXI Express (CompactPCI Express compatible)
PCI Express type		Gen 1		–	Chassis dependent
PCI Express link	1		4	Lanes	Automatic lane negotiation, chassis dependent
PCI Express speed	400		1600	MBytes/s	Depends on # of lanes, chassis, congestion
Power and temperature					
3.3 V PXIe power supply		1.5		A	~ 5 W
12 V PXIe power supply		2		A	~ 24 W

Environmental ¹		
Temperature range	Operating	0 to +45 °C (10,000 feet)
	Non-operating	-40 to +70 °C (up to 15,000 feet)
Max operative altitude		4000 m (10,000 feet)
Operating Humidity range (%RH)		10 to 95% at 40 °C
Non-operating Humidity range (%RH)		5 to 95%
Calibration interval		1 year
EMC		Complies with European EMC Directive <ul style="list-style-type: none"> • IEC/EN 61326-1 • CISPR Pub 11 Group 1, class A This ISM device is in compliance with Canadian ICES-001. Cet appareil ISM est conforme à la norme NMB-001 du Canada. This ISM device is in compliance with Australian and New Zealand RCM. This ISM device is in compliance with South Korea EMC KCC.

1. Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

